



BLS/S/208E



BLS/S/2080

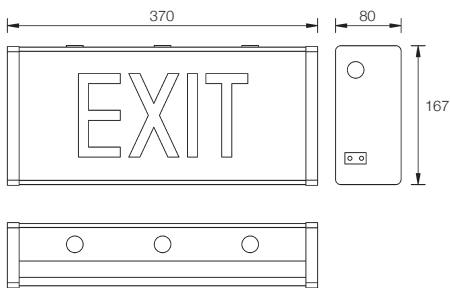

Dimension: mm NTS



Type and batch tested with
PSB PLS-LISTED LABEL

**Surface Mount
Box Exit Sign**



**IP30
CLASS 1**

» Technical Data

Mode of operation	: Combined non-maintained
Lamp	: 2 x 8W fluorescent lamp
Rated duration	: 2 hr and others
Mains supply	: 230 Volts, 50/60Hz
Power consumption	: 10VA
Battery	: High temp nickel cadmium
Charge monitor	: Red LED ø5mm
Test facility	: Micro switch
Safety feature	: Low volt cut-off preventing battery overdischarge
Fitting construction	: Electro galvanised steel with epoxy powder coating
Diffuser	: Fire retardant moulded acrylic
Mounting	: Wall or ceiling
Cable entry	: ø20mm K/O hole
Weight	: 2.5kg (gross)
Compliance	: CP19, SS263 : Part 2, IEC 598-2-22, SS508
Warranty	: 1 year

» Ordering Guide

Please check with Sales Dept if customisation is required

Single Sided	Legend
BLS/S/2080	
BLS/S/208R	
BLS/S/208L	
BLS/S/208RM	
BLS/S/208E	
BLS/S/208W	
BLS/S/208S	
BLS/S/208N	

Specifications subject to changes without prior notice