





UFOS/NM/110

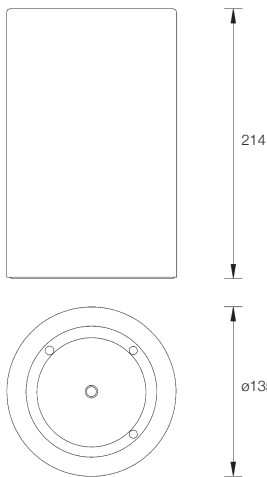

Dimension: mm NTS



**Surface Mount
Emergency Luminaire**



**IP30
CLASS 1**

» Technical Data

Mode of operation	: Non-maintained
Lamp	: 6V 10W miniature tungsten halogen lamp
Rated duration	: 2 hr and others
Mains supply	: 230 Volts, 50/60Hz
Power consumption	: 3VA
Battery	: Maintained-free sealed lead calcium battery (High temp nickel cadmium available)
Charge monitor	: Red LED ø5mm
Test facility	: Push-off test switch
Safety feature	: Low volt cut-off preventing battery overdischarge
Fitting construction	: Electro galvanised steel with epoxy powder coating
Mounting	: Ceiling
Cable entry	: ø20mm K/O hole
Weight	: 2.2kg (gross)
Compliance	: CP19, SS263 : Part 2, IEC 598-2-22
Warranty	: 1 year

» Ordering Guide

Please check with Sales Dept if customisation is required

Model	Battery type
UFOS/NM/110	Sealed lead calcium
UFOS/NM/110 NC	Nickel cadmium

Note:

Sealed lead calcium is highly recommended in non-maintained mode for low replacement cost.

Specifications subject to changes without prior notice