



JW/NM/108

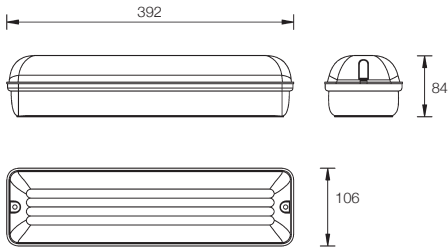

Dimension: mm NTS



**Surface Mount  
Compact Emergency Luminaire**



**IP30**  
Can be upgraded to IP65  
**CLASS 1**

### » Technical Data

Mode of operation	: Non-maintained and others
Lamp	: 1 x 8W fluorescent lamp
Rated duration	: 3 hr (1 x 8W) or 2 hr (2 x 8W)
Mains supply	: 230 Volts, 50/60Hz
Power consumption	: 3VA
Battery	: High temp nickel calcium
Charge monitor	: Red LED ø5mm
Test facility	: Push-off test switch
Safety feature	: Low volt cut-off preventing battery overdischarge
Housing & Cover	: Injection moulded fire retardant high impact polycarbonate diffuser and base. Clear reeded diffuser is designed for non-glare and greater light distribution
Mounting	: Wall or ceiling
Cable entry	: ø20mm K/O hole
Weight	: 1.2kg (gross)
Compliance	: CP19, SS263 : Part 2, IEC 598-2-22
Warranty	: 1 year

### » Ordering Guide

Please check with Sales Dept if customisation is required

Model	Lamp (watt)	Duration (hr)
JW/NM/108	1 X 8 Fluorescent	3
JW/NM/208	2 x 8 Fluorescent	2

Note:

Optional silkscreen printed legend on cover to convert into an emergency exit light.

Specifications subject to changes without prior notice