





JWS/M/108E



JWS/M/1080

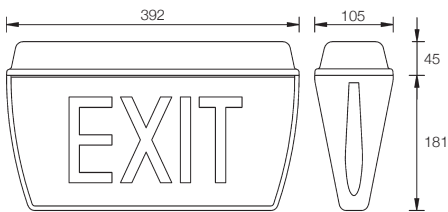

Dimension: mm NTS

Type and batch tested with
PSB PLS-LISTED LABEL



**Surface Mount
Weatherproof Exit Sign**



**IP65
CLASS 1**

» Technical Data

Mode of operation	: Maintained
Lamp	: 1 x 8W fluorescent lamp
Rated duration	: 2 hr and others
Mains supply	: 230 Volts, 50/60Hz
Power consumption	: 10VA
Battery	: High temp nickel cadmium
Charge monitor	: Red LED ø5mm
Test facility	: Push-off test switch
Safety feature	: Low volt cut-off preventing battery overdischarge
Housing & Diffuser	: Injection moulded fire retardant, high impact polycarbonate
Mounting	: Wall or ceiling
Cable entry	: ø20mm K/O hole
Weight	: 2.1kg (gross)
Compliance	: CP19, SS263 : Part 2, IEC 598-2-22, SS508
Warranty	: 1 year

» Ordering Guide

Please check with Sales Dept if customisation is required

Single Sided	Double Sided	Legend
JWS/M/1080	JWD/M/1080	
JWS/M/108R	JWD/M/108R	
JWS/M/108L	JWD/M/108R	
JWS/M/108RM	JWD/M/108RM	
JWS/M/108E	JWD/M/108E	
JWS/M/108W	JWD/M/108E	
JWS/M/108S	JWD/M/108S	
JWS/M/108N		

Specifications subject to changes without prior notice