




PL/M/PL7-PLC13 NC



Dimension: mm NTS

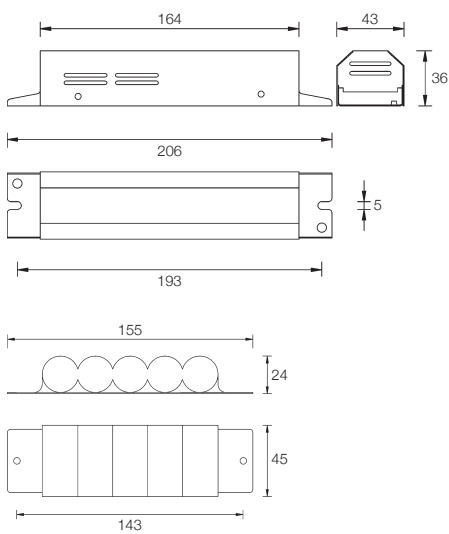

2 Pin PL/PLC Lamp



2 Pin 2D Lamp



» Technical Data

- Mode of operation : Maintained / combined maintained
- Lamp application : 2-pin PL/PLC and 2D lamps
- Rated duration : 2 hr and others
- Mains supply : 230 Volts, 50/60Hz
- Power consumption : 2VA
- Battery : High temp nickel cadmium
- Charge monitor : Red LED ø5mm
- Test facility : Push-off test switch
- Safety feature : Low volt cut-off preventing battery overdischarge
- Fitting construction : Electro galvanised steel with epoxy powder coating
- Weight (Module only) : 0.43kg (gross)
- Compliance : SS490 : Part 2:7, IEC 61347-2-7
- Warranty : 1 year

» Ordering Guide

Please check with Sales Dept if customisation is required

Model	Lamp (watt)
PL/M/PL7-PLC13 NC	7-13
PL/M/PLC18-26 NC	18-26

Note:

Can be incorporated into combined maintained, combined non-maintained and non-maintained mode of operation.

Specifications subject to changes without prior notice