





LS/M/110E



LS/M/1100

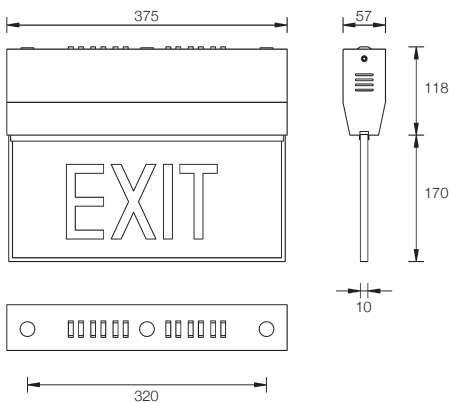

Dimension: mm NTS



Type and batch tested with
PSB PLS-LISTED LABEL

Surface Mount
Slim Exit Sign



IP30
CLASS 1

Technical Data

Mode of operation	: Maintained
Lamp	: 1 x 10W fluorescent lamp
Rated duration	: 2 hr and others
Mains supply	: 230 Volts, 50/60Hz
Power consumption	: 12VA
Battery	: High temp nickel cadmium
Charge monitor	: Red LED ø5mm
Test facility	: Micro switch
Safety feature	: Low volt cut-off preventing battery overdischarge
Fitting construction	: Electro galvanised steel with epoxy powder coating
Diffuser	: Fire retardant moulded acrylic
Mounting	: Wall or ceiling
Cable entry	: ø20mm K/O hole
Weight	: 3kg (gross)
Compliance	: CP19, SS263 : Part 2, IEC 598-2-22, SS508
Warranty	: 1 year

Ordering Guide

Please check with Sales Dept if customisation is required

Single Sided	Double Sided	Legend
LS/M/1100	LD/M/1100	
LS/M/110R	LD/M/110R	
LS/M/110L	LD/M/110R	
LS/M/110RM	LD/M/110RM	
LS/M/110E	LD/M/110E	
LS/M/110W	LD/M/110E	
LS/M/110S	LD/M/110S	
LS/M/110N		

Specifications subject to changes without prior notice