





**MPP/M/PL7-PLC26**

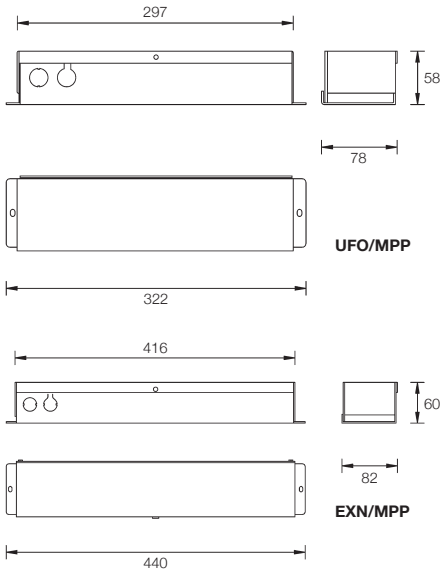

Dimension: mm NTS



**IP30  
CLASS 1**

### » Technical Data

- Mode of operation : Maintained / combined maintained
- Lamp application : 2-pin PL/PLC and 2D lamps
- Rated duration : 2 hr and others
- Mains supply : 230 Volts, 50/60Hz
- Power consumption : 3VA
- Battery : Maintenance-free sealed lead calcium battery (high temperature nickel cadmium available)
- Charge monitor : Red LED ø5mm
- Test facility : Push-off test switch
- Safety feature : Low volt cut-off preventing battery overdischarge
- Fitting construction : Electro galvanised steel with epoxy powder coating
- Cable entry : ø20mm K/O hole
- Weight : 1.5kg (gross), 2kg (gross)
- Compliance : SS490 : Part 2:7, IEC 61347-2-7
- Warranty : 1 year

### » Ordering Guide

Please check with Sales Dept if customisation is required

Model	Lamp (watt)	Remote box size
MPP/M/PL7-PLC26	7-26	EXN/MPP
MPP/M/PL7-PLC13 NC	7-13	UFO/MPP
MPP/M/PLC18-26 NC	18-26	EXN/MPP

Specifications subject to changes without prior notice