




MSS/M/108E



MSS/M/1080

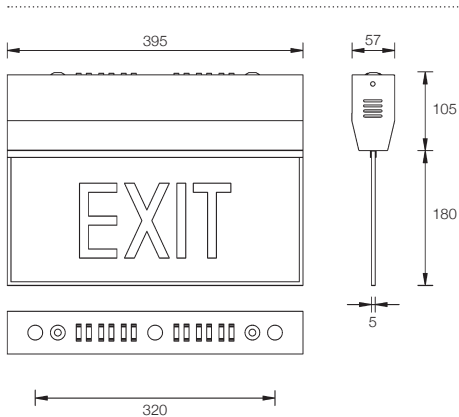

Dimension: mm NTS

### Surface Mount Slim Exit Sign



### » Technical Data

Mode of operation	: Maintained and others
Lamp	: 1 x 8W fluorescent lamp
Rated duration	: 2 hr and others
Mains supply	: 230 Volts, 50/60Hz
Power consumption	: 10VA
Battery	: High temp nickel cadmium
Charge monitor	: Red LED ø5mm
Test facility	: Micro switch
Safety feature	: Low volt cut-off preventing battery overdischarge
Fitting construction	: Electro galvanised steel with epoxy powder coating
Diffuser	: Fire retardant moulded acrylic
Mounting	: Wall or ceiling
Cable entry	: ø20mm K/O hole
Weight	: 2.8kg (gross)
Compliance	: CP19, SS263 : Part 2, IEC 598-2-22, SS508
Warranty	: 1 year

### » Ordering Guide

Please check with Sales Dept if customisation is required

Single Sided	Double Sided	Legend
MSS/M/1080	MSD/M/1080	
MSS/M/108R	MSD/M/108R	
MSS/M/108L	MSD/M/108R	
MSS/M/108RM	MSD/M/108RM	
MSS/M/108E	MSD/M/108E	
MSS/M/108W	MSD/M/108E	
MSS/M/108S	MSD/M/108S	
MSS/M/108N		

Specifications subject to changes without prior notice