




SW/CNM/105



Dimension: mm NTS

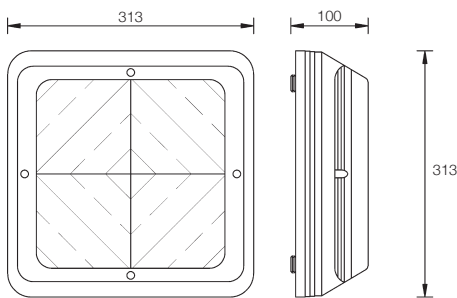

Type and batch tested with  
PSB PLS-LISTED LABEL



Surface Mount  
Emergency Luminaire



IP65  
CLASS 1

### » Technical Data

Mode of operation	: Combined non-maintained
Lamp	: 2 x PLC 18W energy-saving lamp (normal mode of operation) : 6V 5W miniature tungsten halogen lamp (emergency mode)
Rated duration	: 2 hr and others
Mains supply	: 230 Volts, 50/60Hz
Power consumption	: 40VA
Battery	: High temp nickel cadmium
Charge monitor	: Red LED ø5mm
Test facility	: Push-off test switch
Safety feature	: Low volt cut-off preventing battery overdischarge
Housing & cover	: Injection moulded fire retardant high impact polycarbonate base and clear prismatic diffuser
Mounting	: Wall or ceiling
Cable entry	: ø20mm K/O hole
Weight	: 3kg (gross)
Compliance	: CP19, SS263 : Part 2, IEC 598-2-22
Warranty	: 1 year

### » Ordering Guide

Please check with Sales Dept if customisation is required

Model	Lamp (watt)
SW/CNM/105	2 x PLC18 / 1 x 22
SW/CM/218	2 x PLC18
SW/218 PLC	2 x PLC18
SW/122	1 x 22

Note:

Emergency fixtures are not included for SW/218 PLC & SW/122.

Specifications subject to changes without prior notice