





MTL/NM/210-TH



MTL/NM/210-TH WP

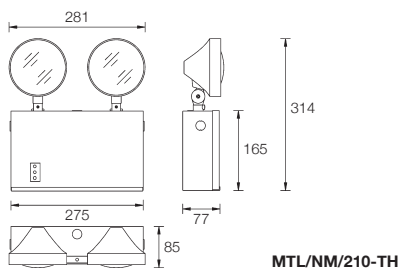


MTL/NM/210-TH

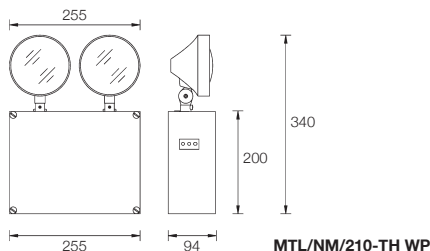

MTL/NM/210-TH WP

Dimension: mm NTS



**Surface Mount
Wide Angle
Emergency Luminaire**



IP30
Can be
upgraded
to IP54

CLASS 1

» Technical Data

Mode of operation	: Non-maintained
Lamp	: 2 x 6V 10W Halogen lamp
Rated duration	: 2 hr and others
Mains supply	: 230 Volts, 50/60Hz
Power consumption	: 4VA
Battery	: Maintenance-free sealed lead calcium battery (High temp nickel cadmium available)
Charge monitor	: Red LED ø5mm
Test facility	: Micro switch
Safety feature	: Low volt cut-off preventing battery overdischarge
Fitting construction	: Electro galvanised steel with epoxy powder coating. The adjustable fire-retardant lamp-heads allow flexibility in angle of projection. Lamp heads comes with anti-glare lens.
Mounting	: Wall
Cable entry	: ø20mm K/O hole
Weight	: 3.5kg (gross)
Compliance	: CP19, SS263 : Part 2, IEC 598-2-22
Warranty	: 1 year

» Ordering Guide

Please check with Sales Dept if customisation is required

Model	Lamp (watt)	Battery type
MTL/NM/210-TH	2 x 10 Halogen	Sealed lead calcium
MTL/NM/220-TH	2 x 20 Halogen	Sealed lead calcium
MTL/NM/210-TH WP	2 x 10 Halogen	Sealed lead calcium

Note:

Can be upgraded to IP54   for all weather condition.

MTL/NM/210-TH WP   for all weather condition.

All above specifications are available in nickel cadmium version.

Specifications subject to changes without prior notice